






# Pigtail bulb room thermostats

Enclosure	Type	Operation	Contact	Measurement	Ranges °C	Models
IP44	Control	Mechanical	SPDT	Ambient		
Material						
PC-ABS						Y035 & Y036

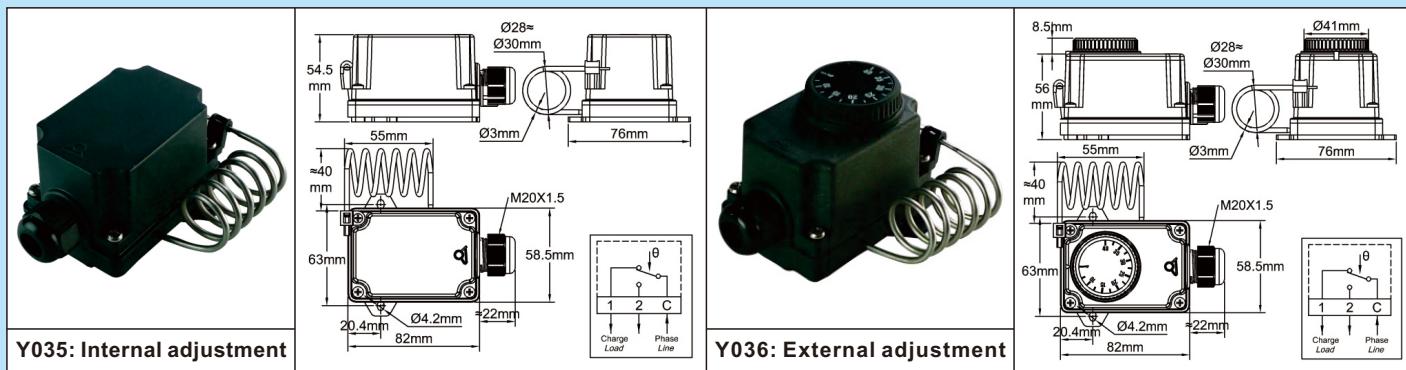

**Housing:** IP44, black PC-ABS, fiber glass reinforced, UL94V0. High impact and UV resistance. 2 removable wall mounting lugs.

**Cable input:** One M20 cable gland.

**Set point adjustment:** By °C printed knob for external adjustment models, by screw driver and printed dial on internal adjustment models. °F values available as an option.

**Sensing element:** Liquid filled bulb, coiled on the side of enclosure.

**Adjustment range:** 4-40°C (40-105°F)

**Electrical connections:** 3 screw terminal connection block

**Mounting:** Wall mounting, by two side lugs with holes for dia. 4 mm screws, 63 mm distance.

**Contact:** SPDT

**Electrical rating, resistive loads:**

-Open on temperature rise contact (C-1) 16A 250V, 50 ~60Hz: >100000 cycles,

20A 250V, 50 ~60Hz: ≥ 50000 cycles,

10A 400V, 50 ~60Hz: ≥ 50000 cycles.

-Close on temperature rise contact (C-2) (C-2): 6A 250V 50 ~60Hz: >100000 cycles

**Electrical rating, inductive loads:**

-Open on temperature rise contact (C-1): 6A 250V, 50 ~60Hz: >100000 cycles

-Close on temperature rise contact (C-2): 0.6A 250V 50 ~60Hz: >100000 cycles.

**Minimum storage temperature:** -35°C (-30°F)

**Maximum ambient temperature:** 60°C (140°F)

For more technical information ask 8G thermostat technical data sheet.

## References

Temperature ranges °C (°F)	Internal	External adjustment	Differential °C (°F)	Max temperature on bulb °C (°F)
4-40 (40-105)	Y035GB004040QB3J	Y036GB004040QB3J	1±0.5°C (1.8±1°F)	60 (140)

°F printing: replace last character (J) by K

## Knob printings

°C Printing	
4-40°C	40-105°F

