


PA66 connection blocks 400V range, surface mounting



Not protected against accidental electric contact

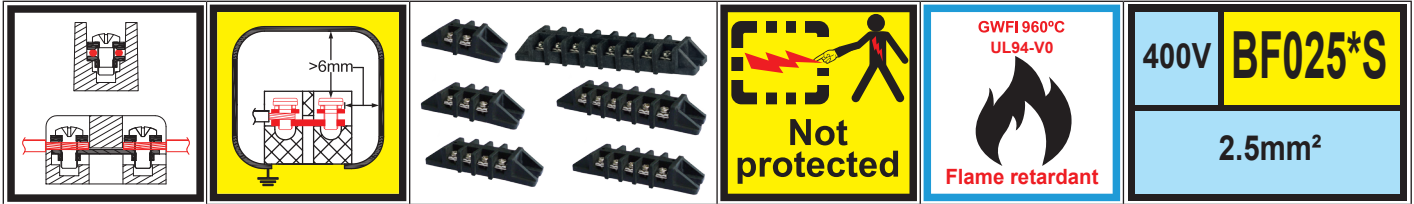

Nickel plated steel screws and square washers on both sides.

BF0252SS	13 gr.	Screw terminal	BF0253SS	18 gr.						
		<p>2 x 2.5mm² / 2 x 1.5mm² / 2 x 1mm² 2 x AWG14 / 2 x AWG16 / 2 x AWG18</p>								
	24 gr.	<p>2 x 2.5mm² / 2 x 1.5mm² / 2 x 1mm² 2 x AWG14 / 2 x AWG16 / 2 x AWG18</p>		28 gr.						
	34 gr.	<p>0.5 N.m M3</p> <table border="1"> <tr> <td>400V</td> <td>24A</td> </tr> <tr> <td>Permanent</td> <td>180°C/356°F</td> </tr> <tr> <td>Peak</td> <td>200°C/392°F</td> </tr> </table>	400V	24A	Permanent	180°C/356°F	Peak	200°C/392°F		42 gr.
400V	24A									
Permanent	180°C/356°F									
Peak	200°C/392°F									



Page (.pdf)



Drawing 2D (.dwg)



Drawing 3D (.stp)

Excerpt from catalogue 10-2

