


PA66 connection blocks 400V range, surface mounting



Not protected against accidental electric contact

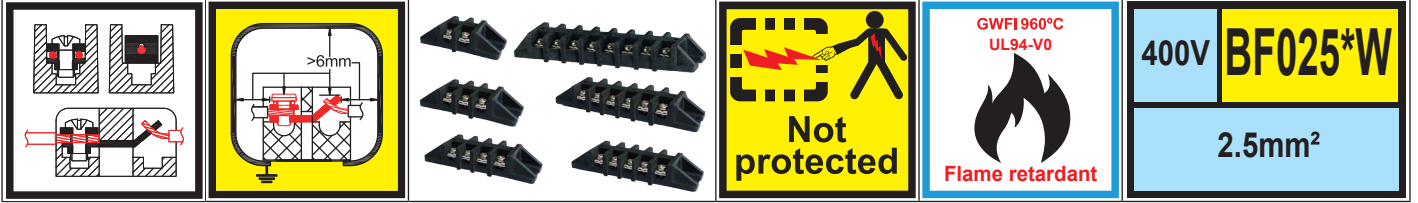

Nickel plated steel screws and square washers on one side, solder terminals on the other side

Because of permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice

BF0252WS	16 gr.	Screw terminal	BF0253WS	22 gr.				
	<p>2 x 2.5mm² / 2 x 1.5mm² / 2 x 1mm² 2 x AWG14 / 2x AWG16 / 2 x AWG18</p>	<p>2 x 2.5mm² / 2 x 1.5mm² / 2 x 1mm² 2 x AWG14 / 2x AWG16 / 2 x AWG18</p>		22 gr.				
BF0254WS	28 gr.		BF0255WS	34 gr.				
	<p>0.5 N.m M3</p>	Solder terminal		34 gr.				
BF0256WS	41 gr.	<p>2.5mm² / 1.5mm² / 1mm² AWG14 / AWG16 / AWG18</p>	BF0258WS	52 gr.				
	<p>2.5mm² / 1.5mm² / 1mm² AWG14 / AWG16 / AWG18</p>	<p>400V 24A</p> <table border="1"> <tr> <td>Permanent</td> <td>180°C/356°F</td> </tr> <tr> <td>Peak</td> <td>200°C/392°F</td> </tr> </table>	Permanent	180°C/356°F	Peak	200°C/392°F		52 gr.
Permanent	180°C/356°F							
Peak	200°C/392°F							



Page (.pdf)



Drawing 2D (.dwg)



Drawing 3D (.stp)

Excerpt from catalogue 10-2



E-Mail: info@ultimheat.com Web: www.ultimheat.com