


Fitting gaskets for immersion heaters, thermostats, temperature sensors or level sensors in compressed fiber without asbestos

Minimum Size	Maximum Size	Material	Type	Model
1"	M77 × 2	Asbestos-free compressed fiber	Rigid flat gaskets	66JF

Compatible with:	
<input checked="" type="checkbox"/> 66RJ	<input checked="" type="checkbox"/> 66R3
<input checked="" type="checkbox"/> 66RU	<input checked="" type="checkbox"/> 66R4
<input checked="" type="checkbox"/> 66RK	<input checked="" type="checkbox"/> 66R5
<input checked="" type="checkbox"/> 66RV	<input checked="" type="checkbox"/> 66R6
<input checked="" type="checkbox"/> 66RO	<input checked="" type="checkbox"/> 66R7
<input checked="" type="checkbox"/> 66RP	<input checked="" type="checkbox"/> 66R8
<input checked="" type="checkbox"/> 66RQ	<input checked="" type="checkbox"/> 66R9
<input checked="" type="checkbox"/> 66RR	<input checked="" type="checkbox"/> 66RW
<input checked="" type="checkbox"/> 66R2	<input checked="" type="checkbox"/> 66RY

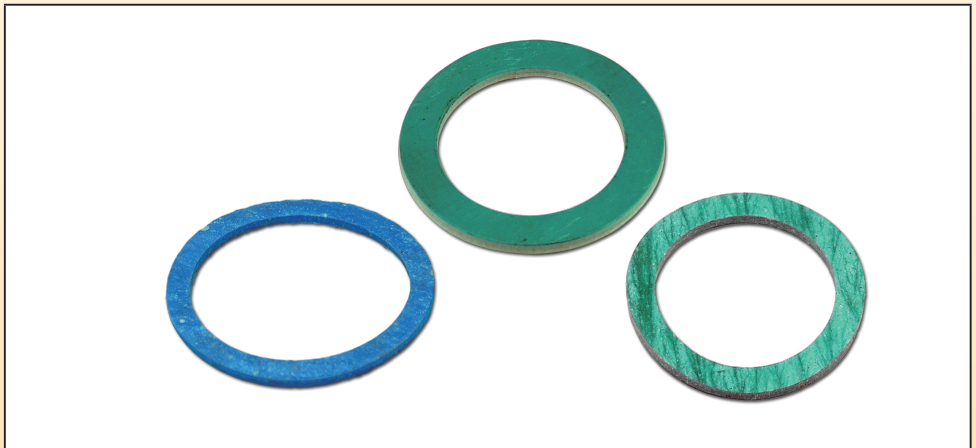

	1"	1-1/4"	1-1/2"	M45x2	2"	2-1/2"	M77x2
A	Ø32	Ø40	Ø44	Ø44	Ø58	Ø74	Ø74
B	Ø50	Ø62	Ø62	Ø62	Ø76	Ø95	Ø95
C	2.2	2.2	2.2	2.2	2.2	2.2	2.2

Main references

Dimensions	References	Dimensions	References
1"	66JFC32022500000	2"	66JFC58022760000
1-1/4"	66JFC40022620000	2-1/2" M77x2	66JFC74022950000
1-1/2" M45x2	66JFC44022620000		

Links

Page
(.pdf)

Drawing 2D
(.dwg)

Drawing 3D
(.stp)

Red dimensions inside rectangular frames on drawings are used for assembly on enclosures or on fittings.

